






BYTESCREEN

CONNECT • DETECT • PROTECT

PPPoE WAN Configuration

1. Login in the <https://fusionm.bytescreentech.com> (Management Controller)
2. Click Network (in right side menu bar)

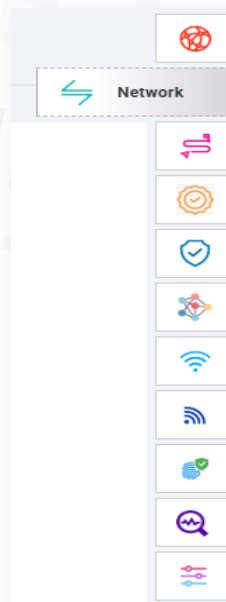
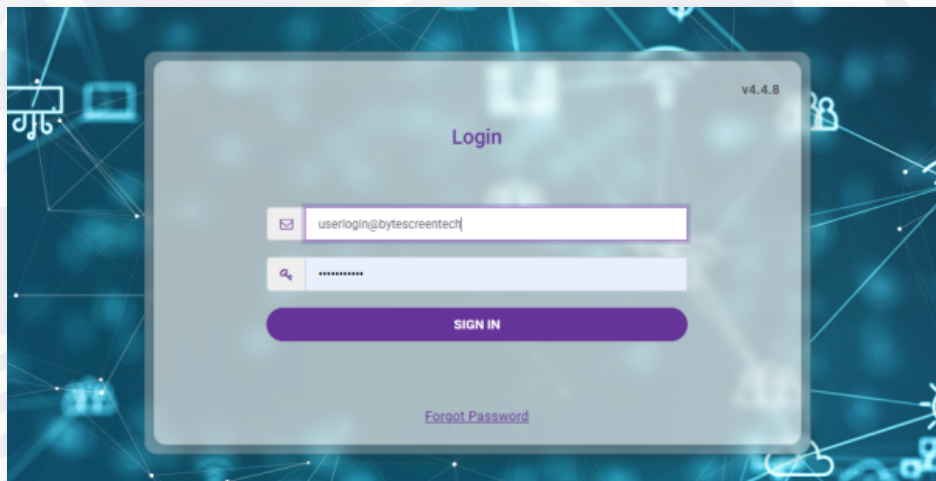


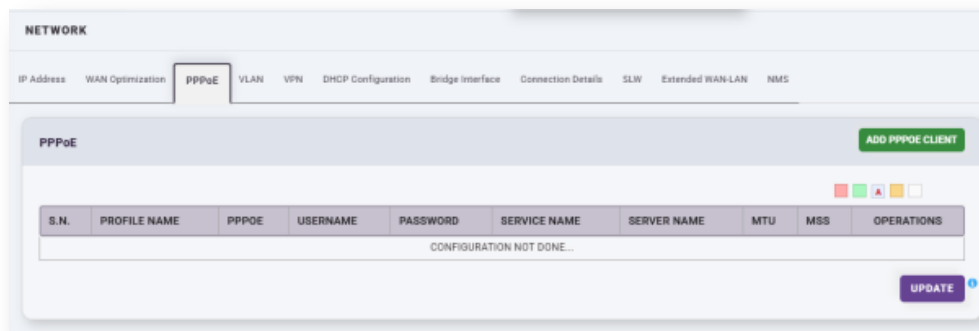

DHCP is enabled on all interfaces by default, except for the LAN interface.

If the internet cable is connected with DHCP enabled, the internet will start automatically without requiring any configuration.

For PPPoE internet configuration, go to Network => PPPoE click on "Add PPPoE Client".

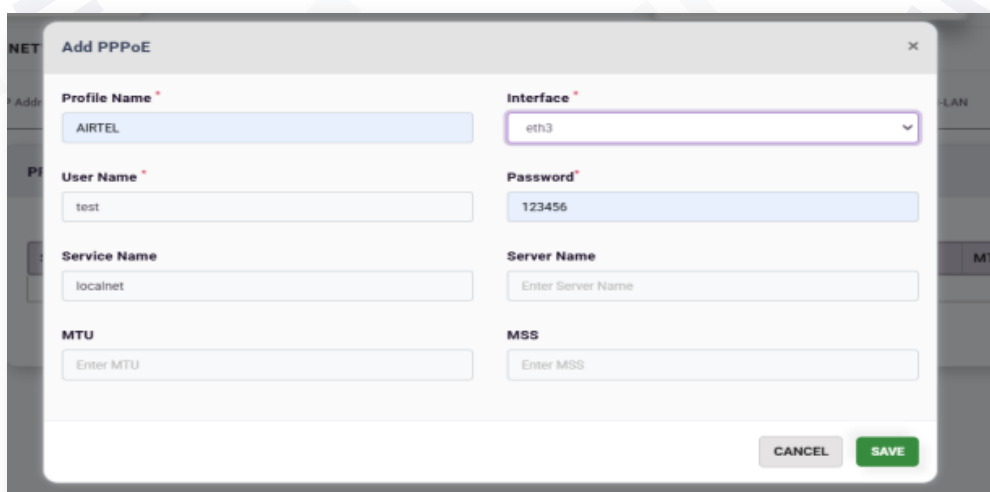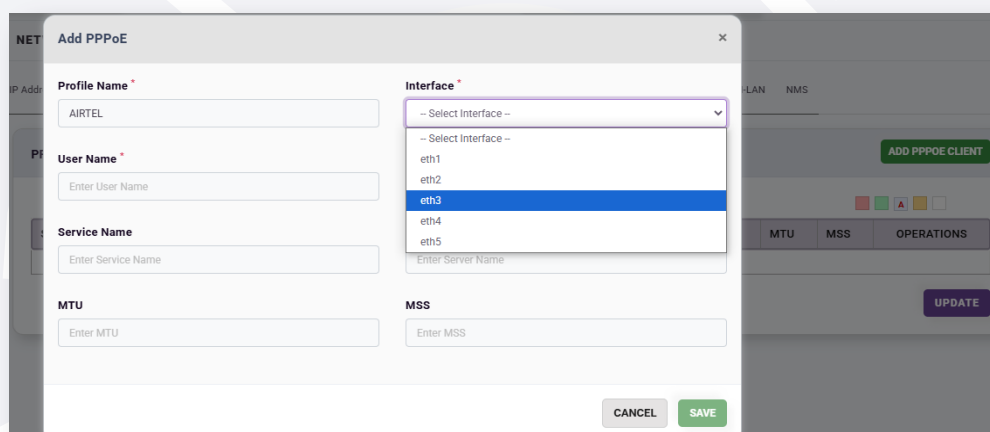

2

1. Profile Name: Add any name
2. Interface: Select the interface you want to configure.
3. User Name: Add PPPoE connection user name, provided by your ISP.
4. Password: Add PPPoE connection password, provided by your ISP.
5. Service Name: Add service name if provided by your ISP (it's a optional).
6. Server Name: Add server name if provided by your ISP (it's a optional).
7. MTU: Add if provided by your ISP or leave blank.
8. MSS: Add if provided by your ISP or leave blank.

After completing all the required details, click the Save button.

NETWORK

IP Address WAN Optimization **PPPoE** VLAN VPN DHCP Configuration Bridge Interface Connection Details SLW Extended WAN-LAN NMS

PPPoE ADD PPPoE CLIENT

S.N.	PROFILE NAME	PPPOE	USERNAME	PASSWORD	SERVICE NAME	SERVER NAME	MTU	MSS	OPERATIONS
1	AIRTEL	eth3	test	123456	localnet	DISABLE	DISABLE	DISABLE	 

Number of records : 1 rows

Some changes has been done in above configuration - required update.

UPDATE

After adding the configuration update the setting to apply.