





BYTESCREEN

CONNECT • DETECT • PROTECT

WAN Configuration

1. Login in the <https://fusionm.bytescreentech.com> (Management Controller)
2. Click Network (in right side menu bar)

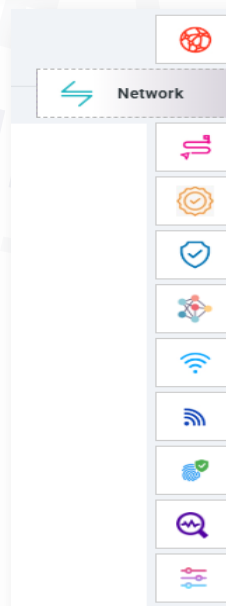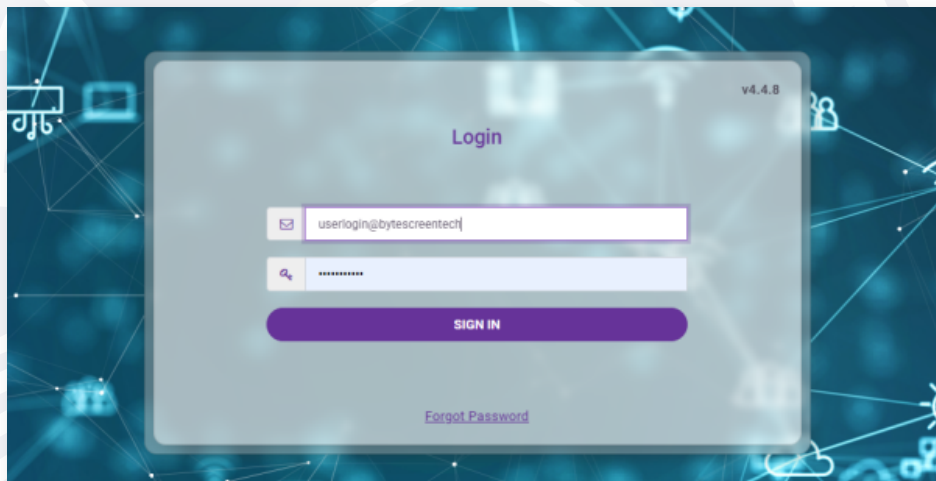

NETWORK

IP Address WAN Optimization PPPoE VLAN VPN DHCP Configuration Bridge Interface Connection Details SLIP Extended WAN/LAN NMS

IP Address ADD IP ADDRESS

SR NO.	IP ADDRESS	INTERFACE	TYPE	GROUP BY	PROVIDER / DESCRIPTION	OPERATION
1	100.64.100.1/24	eth5	LAN		N/A	  

Number of records : 1 rows

UPDATE

DHCP is enabled on all interfaces by default, except for the LAN interface.

If the internet cable is connected with DHCP enabled, the internet will start automatically without requiring any configuration.

For manual static IP configuration, click on "Add IP Address."

NETWORK

IP Address WAN Optimization PPPoE VLAN

IP Address ADD IP ADDRESS

SR NO.	IP ADDRESS
1	100.64.100.1/24

Number of records : 1 rows

Add IP Address

Type*
 -- Select Type --
 Internet
 MPLS
 P2P
 LAN
 DMZ

Interface*
 -- Select Interface --
 Interface is Required

CANCEL SAVE

Add IP Address

Type*
 Internet

IP Address*
 Enter IP Address Mask
 100.64.100.1/24

Balance*
 100

DNS IP Address*
 Enter DNS IP Address

Interface*
 -- Select Interface --
 eth1
 eth2
 eth3
 eth4
 eth5
 eth6

CANCEL SAVE

NETWORK

Add IP Address

Type*
 Internet

Interface*
 eth3

IP Address*
 49.207.187.187 30

Gateway IP Address*
 49.207.187.186

Balance*
 100

DNS IP Address*
 8.8.8.8


Domain*
 google.com

CANCEL SAVE

2

1. Type: Select Internet.
2. Interface: Select the interface you want to configure.
3. IP Address: Enter the IP address provided by your ISP.
4. Mask: Select the subnet mask provided by your ISP, e.g., 24 (255.255.255.0), 28 (255.255.255.240), or 30 (255.255.255.252).
5. Gateway: Enter the gateway IP address provided by your ISP.
6. Balance: Set to 100.
7. DNS IP Address: Enter the primary DNS provided by your ISP or use a global DNS such as 8.8.8.8.
8. Domain: Enter google.com or any preferred domain.

After completing all the required details, click the Save button.

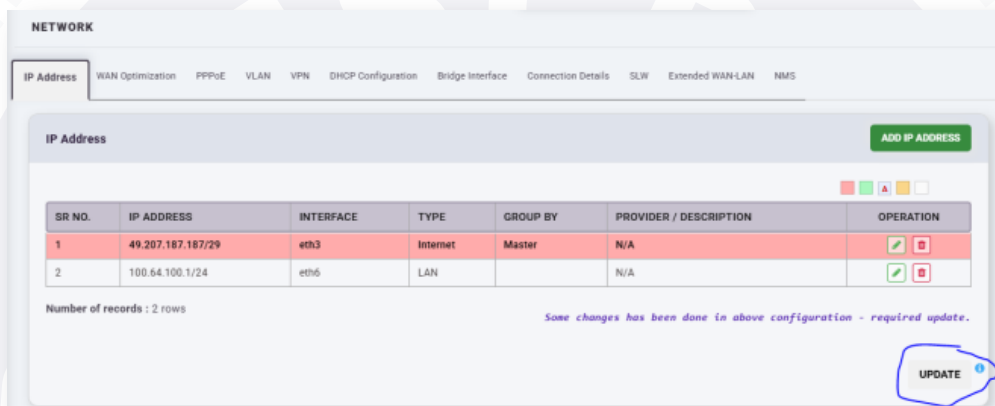

NETWORK

IP Address | WAN Optimization | PPPoE | VLAN | VPN | DHCP Configuration | Bridge Interface | Connection Details | SLW | Extended WAN-LAN | NMS

IP Address

ADD IP ADDRESS

SR NO.	IP ADDRESS	INTERFACE	TYPE	GROUP BY	PROVIDER / DESCRIPTION	OPERATION
1	49.207.187.187/29	eth3	Internet	Master	N/A	 
2	100.64.100.1/24	eth6	LAN		N/A	 

Number of records : 2 rows

Save changes has been done in above configuration - required update.

UPDATE

After adding the configuration update the setting to apply.